


ANACONDA SEALTITE® CONDUIT OPTIONS



TEMPERATURE RANGES

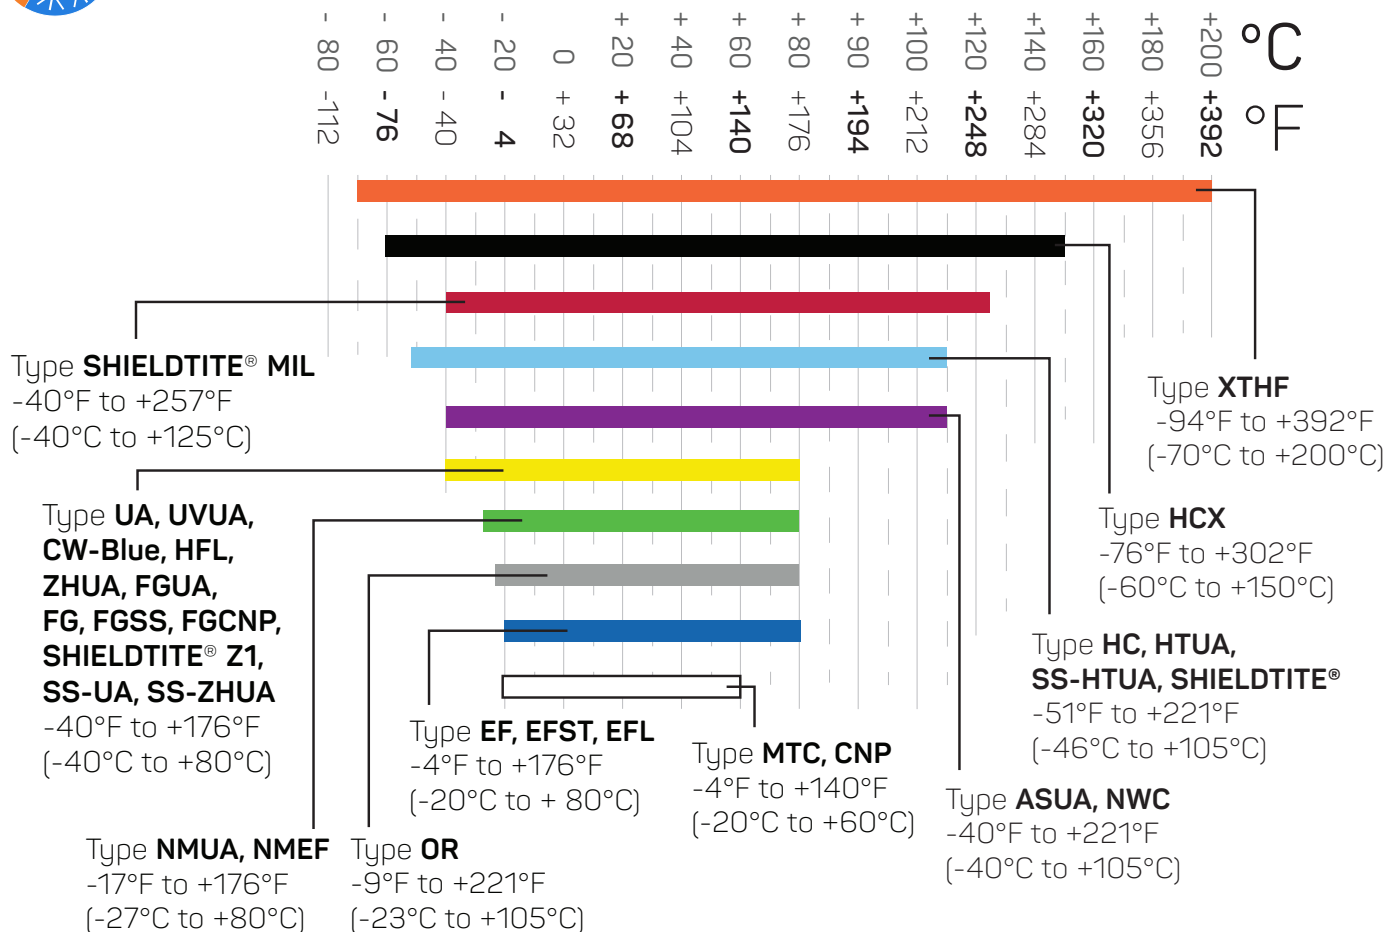


LIGHT WEIGHT AND EXTRA FLEXIBLE

Options among SEALTITE Conduit Type NMUA, EFL, MTC, CNP and EFST

Trade Size (mm)	Type	Bend Radius (inches)	Weight (lbs/100 ft)
3/8" (12)	NMUA	2.0	11
	EFL	2.0	14
	CNP	2.5	15
	MTC	1.5	16
	EFST	2.0	21

Trade Size (mm)	Type	Bend Radius (inches)	Weight (lbs/100 ft)
1/2" (16)	EFL	2.5	16
	NMUA	4.5	20
	MTC	2.0	20
	CNP	3.0	21
	EFST	2.5	25

Trade Size (mm)	Type	Bend Radius (inches)	Weight (lbs/100 ft)
3/4" (21)	EFL	3.0	19
	NMUA	4.5	20
	MTC	2.5	24
	CNP	2.5	25
	EFST	3.0	39



HALOGEN FREE: Type HCX, ZHUA, SS-ZHUA, SHIELDTITE® Z1, SHIELDTITE® MIL, XTHF, HFL and NWC

UL LISTED: Type UA, SS-UA, ASUA, CW, HTUA, SS-HTUA, ZHUA, SS-ZHUA, FGUA, SS-FGUA, UVUA, CNP, FGCNP and NMUA

CSA APPROVED: Type UA, ASUA, CW, HTUA, ZHUA, FGUA, CNP and NMUA