

Factory Automation

ANACONDA SEALTITE® CONDUIT

Identify critical circuits using brightly colored conduit.

ANAMET conduit and fittings protect wiring and cable from

- Intrusion and security breach
- Stress and strain
- Water and corrosion

**TO
CONNECT
AND
PROTECT**


PHONE: (800) 230-3718
ANAMETELECTRICAL.COM
SALES@ANAMETELECTRICAL.COM

ANAMET Electrical, Inc. 
ANACONDA SEALTITE®

ANAMET Electrical is the exclusive manufacturer of ANACONDA SEALTITE® liquid tight wiring conduit and industrial stripwound hose.

Protect work and workers

ANACONDA SEALTITE® liquid tight conduit and fittings

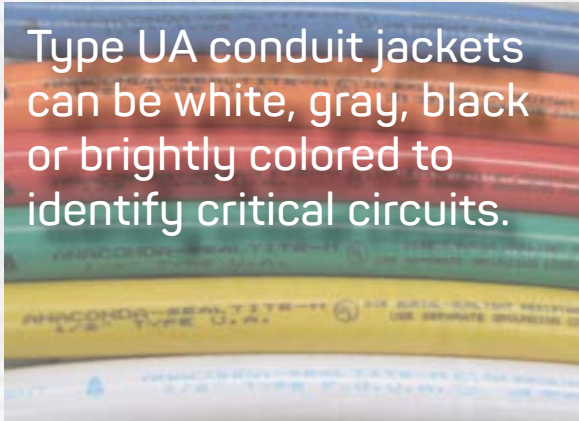

Type UA conduit jackets can be white, gray, black or brightly colored to identify critical circuits.



CW-BLUE conduit

MTC 3/8 to 2 inch diameter Machine Tool Extra Flexible Conduit

SPECIFICATIONS

- Galvanized steel core with liquid tight PVC jacket
- Color: Black
- Temp. range: (-4°F to +140°F)
-20°C to +60°C
- UV (sunlight) resistant
- Corrosion resistant
- Tight bend radius

APPLICATIONS

- Armor casing for flexible drive shafts
- High flexibility
- Machine tool industry



Type MTC conduit is highly flexible for machine tool applications.



RoHS WEEE Compliant

1-800-230-3718 cs@anametelectrical.com www.anametelectrical.com

CW-BLUE 1/2 to 3 inch diameter

Computer flexible conduit

SPECIFICATIONS

- Uses standard liquid tight connectors
- Color: Blue
- Temp. range: -40°F to +176°F
(-40°C to +80°C)

APPLICATIONS

- Protect cable and wiring in data centers
- Approved for direct burial and in concrete at trade sizes 1/2"-3"
- Approved for use in cable raceways and raised floors

UA 3/8 to 4 inch diameter

Flexible metallic conduit

SPECIFICATIONS

- Uses standard liquid tight connectors
- Color: Pantone Matching System colors
- UL Listed and CSA Approved
- UL certified for temperature ranges -40°F to +176°F (-40°C to +80°C).
CSA certified for 60°C dry / 60°C oil.

APPLICATIONS

- Protect cable and wiring in data centers
- Approved for direct burial and in concrete at trade sizes 1/2"-3"

CNP 3/8 to 2 inch diameter

Type A Non-metallic Flexible Conduit

SPECIFICATIONS

- Smooth inner PVC core with outer oil resistant PVC cover bonded with nylon reinforcing braid
- Temperature range: -4°F to +140°F
(-20°C to 60°C)
- Color: Orange or Gray
- UV (sunlight) resistant, Flame retardant
- Oil resistant
- UL Listed and CSA Approved

APPLICATIONS

- Machine applications where non-metallic and flexing required

ANAMET Electrical, Inc. 
ANACONDA SEALTITE®