

# Factory Automation

## ANACONDA SEALTITE® CONDUIT

Identify critical circuits using brightly colored conduit.

ANAMET conduit and fittings protect wiring and cable from

- Intrusion and security breach
- Stress and strain
- Water and corrosion



**TO  
CONNECT  
AND  
PROTECT**


PHONE: (800) 230-3718  
ANAMETELECTRICAL.COM  
SALES@ANAMETELECTRICAL.COM

**ANAMET Electrical, Inc.** 

ANAMET Electrical is the exclusive manufacturer of ANACONDA SEALTITE® liquid tight wiring conduit and industrial stripwound hose.

# Protect work and workers

## ANACONDA SEALTITE® liquid tight conduit and fittings

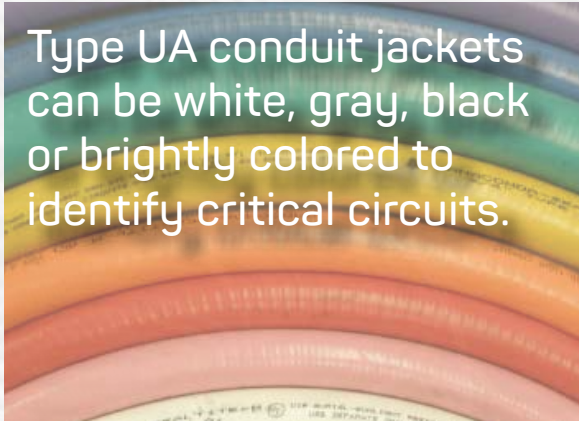

## MTC 3/8 to 2 inch diameter Machine Tool Extra Flexible Conduit

### SPECIFICATIONS

- Galvanized steel core with liquid tight PVC jacket
- Color: Black
- Temperature range: -4°F to +140°F (-20°C to +60°C)
- UV (sunlight) and corrosion resistant
- Tight bend radius

### APPLICATIONS

- Armor casing for flexible drive shafts
- High flexibility
- Machine tool industry



Type MTC conduit is highly flexible for machine tool applications.



RoHS WEEE Compliant

## CW-BLUE 1/2 to 3 inch diameter

Computer flexible conduit

### SPECIFICATIONS

- Uses standard liquid tight connectors
- Color: Blue
- Temperature range: -40°F to +176°F (-40°C to +80°C)

### APPLICATIONS

- Protect cable and wiring in data centers
- Approved for direct burial and in concrete at trade sizes 1/2"-3"
- Approved for use in cable raceways and raised floors

## UA 3/8 to 4 inch diameter

Flexible metallic conduit

### SPECIFICATIONS

- Uses standard liquid tight connectors
- Color: Pantone Matching System colors
- UL Listed and CSA Approved
- UL certified for temperature range -40°F to +176°F (-40°C to +80°C).  
CSA certified for 60°C dry / 60°C oil.

### APPLICATIONS

- Protect cable and wiring in data centers
- Approved for direct burial and in concrete at trade sizes 1/2"-3"

## CNP 3/8 to 2 inch diameter

Type A Non-metallic Flexible Conduit

### SPECIFICATIONS

- Smooth inner PVC core with outer oil resistant PVC cover bonded with nylon reinforcing braid
- Temperature range: -4°F to +140°F (-20°C to 60°C)
- Color: Orange or Gray
- UV (sunlight) resistant, Flame retardant
- Oil resistant
- UL Listed and CSA Approved

### APPLICATIONS

- Machine applications where non-metallic and flexing required