

WHITE PAPER: How Flexible Does Conduit Need To Be?

If you need to protect wiring from crushing force, frequent bending or vibration, ANAMET Electrical, Inc. flexible conduit offers effective options.

- **Types EF, EFST, EFL and HFL** have similar flexibility, protecting wiring in factory and industrial locations. Both EFL and HFL (Halogen Free) conduit have an aluminum core, for applications needing a lighter weight conduit.
- **Type MTC** (machine tooling conduit) was developed for robot and factory automation, connecting wiring and linkages that must be frequently bent.
- **UL listed Type CNP** (conduit non-metallic PVC Type A) was developed to protect control wiring for production machinery in automotive factories.
- **UL listed Type NMUA** PVC conduit supports HVAC outdoor installations.
- **UL listed Types RWA and RWS** are bare conduit types that have served the construction industry for decades.

The National Electrical Code (NEC) defines three different kinds of flexible electrical conduit. Underwriter's Laboratories (UL) tests these conduit types to these operating Standards. The Canadian Standards Association (CSA) has similar requirements in their Standards.




- UL 1 is for flexible metal conduit (FMC, Flex or Greenfield). It is approved for dry locations.
- UL 360 is for liquid tight, flexible metal conduit (LFMC such as ANACONDA SEALTITE®). It is approved for burial and wet conditions.
 - Galvanized steel conduit with an integral bonding wire is conductive for grounding equipment within six feet.
 - Stainless steel conduit requires a separate grounding conductor or bonding jumper.
- UL 1660 is for liquid tight, flexible non-metallic conduit (LFNC). It is non-conductive, but is approved for burial and wet conditions.

Several factors affect conduit flexibility allowed by the hose structure:

- The spacing between metal convolutions
- Packing in metal convolutions (wire or fiber)
- The elasticity or rigidity of conduit jacket material (this does not apply to FMC bare conduit)
- The structure of thermoplastic extruded around conduit (injected between or laid over the convolutions)

Because flexibility is an important factor in the life and use of conduit, bend radius is published for each type of conduit. UL and CSA test conduit flexibility at various temperatures to make sure of no cracking or degradation of the conduit jacket occurs at the rated temperatures.

For more information, visit www.anacondasealtite.com.

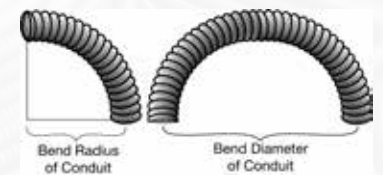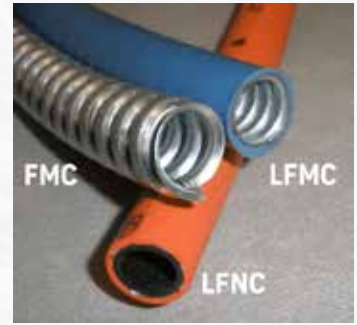

Trade Size (mm)	Type	Bend Radius (inches)	Weight (lbs/100 ft)
1/2" (16)	EFL	2.5	16
	NMUA	4.5	20
	MTC	2.0	20
	CNP	3.0	21
	EFST	2.5	25

Trade Size (mm)	Type	Bend Radius (inches)	Weight (lbs/100 ft)
3/4" (21)	EFL	3.0	19
	NMUA	4.5	20
	MTC	2.5	24
	CNP	2.5	25
	EFST	3.0	39



ANACONDA SEALTITE®
ANAMET ELECTRICAL, INC.

Customer Service: (800) 230-3718
Fax: (800) 677-2706
Email: info@anametelectrical.com

ANAMET Electrical, Inc.
1000 Broadway Ave. East
Mattoon, IL 61938